



Forming Systems, Inc.
P.O. Box 694
Schoolcraft, MI 49087 USA

Phone: 877-727- FORM (3676)
269-679-3557 (International)
Fax: 269-679-3567
Email: info@formingsystemsinc.com



Box Type Furnaces

HB 6 / HB 9 / HB 25



HB9



HB25

FEATURES

- 24 hour on/off timer
- 60 minute timer
- Flashing alarm and buzzer system
- Buzzer system
- 500°F Max. temp. (930°F)
- P.I.D. temperature control
- Solid State Relay (SSR) on/off heating control


BENEFIT

- Provides energy savings & safety
- Insures accurate & efficient operation
- Signal when work is complete
- Over 520°C (970°F) safety
- Handles a wide variety of material
- Insures uniform & accurate temperature
- Provides high efficiency heat control

HB6/9/25 Box Type Furnaces



HB6

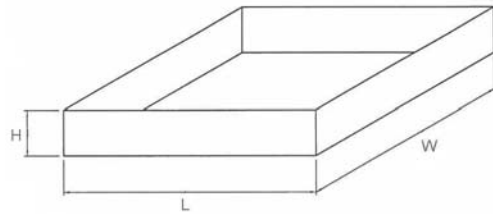

TRAY DIMENSION

	L	W	H	TRAY NUMBER
HB 6	220mm	185mm	25mm	1
HB 9	220mm	285mm	25mm	1
HB25	350mm	350mm	25mm	2

SPECIFICATION

MODEL	HEATING CHAMBER (WxDxH)	MAX. TEMP.	ELECTRIC CAPACITY	OUTSIDE DIMENSION	WEIGHT
HB 6	220x200x140mm (9"x8"x6")	500°C (930°F)	1.8 KW	450x435x730mm (18"x17"x29")	55KGS (120LBS)
HB 9	220x300x140mm (9"x12"x6")	500°C (930°F)	2.7 KW	450x535x730mm (18"x21"x29")	65KGS (140LBS)
HB25	360x360x240mm (14"x14"x9")	500°C (930°F)	4.5 KW	580x620x870mm (23"x24"x34")	85KGS (190LBS)